

海绵夹

FOAM RUBBER CLAMPS



应用范围：

适用于弹性易变形产品。

Applications:

Used in palletless handling of elastic & easy deformed loads.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业。
- E型槽的整体框架，提高产品的稳定性和寿命。
- 设计合理，美观大方，采用世界上最优质的液压元件。

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- E-Style-Slot frame provides excellent stability and longer operating life.
- Reasonable design with dependable world top quality hydraulic components.


产品系列：

- 侧移式

Product Series:

- Sideshifting



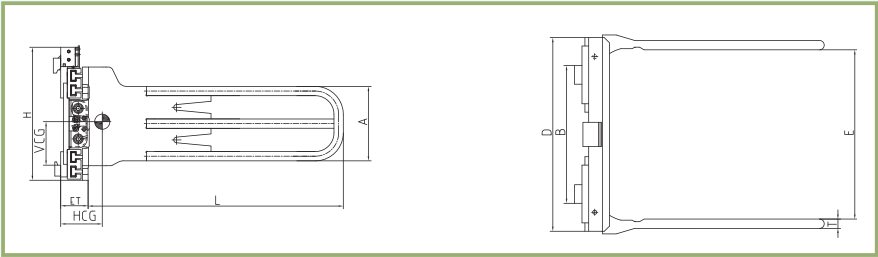

侧移式

Sideshifting

型 号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range E (mm)	失 载 距 Effective Thickness ET (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	臂 长 Arm Length L (mm)	臂 高 Arm Height A (mm)	臂厚 Arm Thickness T (mm)	总高 Height H (mm)	货叉架最 小宽度 Fork Minimum width B (mm)	框架 宽度 Frame Width D (mm)	安 装 等 级 Moun- ting Class
G44S07-230A172	700/1250	750-2300	147	270	765	220	2500	400	50	714	890	1040	2
G44S10-260A22	1000/500	1100-2600	147	252	732	220	1000	400	50	714	1040	1250	2
G44S07-320A102	700/900	1800-3200	147	230	850	220	1800	400	50	714	1040	2000	2
G44S10-260B102	1000/900	750-2600	158	228	780	240	1800	600	50	790	1100	1640	2
G44S08-260B172	850/1250	750-2600	158	240	830	240	2500	600	50	790	1100	1640	2

注：

- 1、承载能力是载荷中心为 500mm 的设计值，实际的叉车 / 属具综合承载能力请从叉车制造商获取。
2、侧移式夹类要求叉车增加 2 组附加油路，非侧移式夹类要求叉车增加 1 组附加油路。
3、可根据客户特殊工况要求，提供相应匹配产品

Note:

1. The capacity is designed at 500mm load centre, contact the forklift manufacture for the actual capacity of forklift/attachments.
2. Two additional hydraulic circuits required on truck for Side shifting models, one additional on truck for Non-side shifting models.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

流量及压力要求

Hydraulic Flow & Pressure

非侧移/侧移

Non-Sideshifting/Sideshifting

型 号 Model	最小流量 Minimum	推荐流量 Recommended	最大流量 Maximum	最大压力 Maximum Pressure
	LPM			BAR
G44S10-260A42	15 LPM	25 LPM	25 LPM	160 Bar
G44S04-320A102	15 LPM	25 LPM	25 LPM	160 Bar
G44S10-260B102	15 LPM	25 LPM	25 LPM	160 Bar
G44S08-260B102	15 LPM	25 LPM	25 LPM	160 Bar

注：

- 1、可选用非侧移式夹类。
2、左右夹臂各自独立运动式夹类。

Options:

1. Non-Side shifting models.
2. Left and right arms independent movement.