

叉 夹

FORK CLAMPS



应用范围：

可用于夹持货物，也可用于叉车托盘货物

Applications:

Suitable for clamping cargo and also for pallet handling.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- E型槽的整体框架，提高产品的稳定性和寿命
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- E-Style-Slot frame provides excellent stability and longer operating life.
- Reasonable design with dependable world top quality hydraulic components.

产品系列：

- 侧移式
- 非侧移式
- 旋转式


Product Series:

- Non-sideshifting
- Sideshifting
- Rotating



GRIPFTA®

GRIPFTA

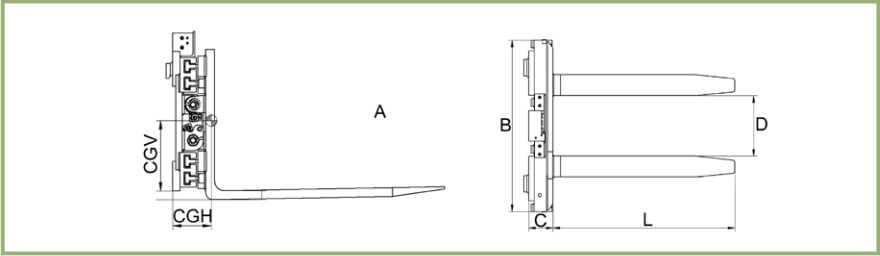

非侧移式 Non-Sideshifting

型 号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre	张臂范围 Opening Range	失 载 距 Effective Thickness	水平重心 Horizontal Center of Gravity CGH	自 重 Weight	垂直重心 Vertical Center of Gravity CGV	叉 长 Arm Length	框架宽度 Frame Width	安 装 等 级 Mounting Class
	(kg/mm)	D (mm)	C (mm)	(mm)	(kg)	(mm)	L (mm)	B (mm)	
GJ07BL20-166A40	2000/500	365-1665	147	220	355	265	1200	1040	2
GJ07BL20-189A40	2000/500	460-1890		215	375			1100	
GJ07BL27-189B40	2700/500	460-1890	158	245	455	245	1200	1140	3
G07B10-154A10	1000/500	440-1540	188	160	300	170	900	850	2
G07B10-154A20				190	310	160	1000		
G07B15-166A10	1500/500	365-1665	200	165	410	180	900	1040	2
G07B15-166A20				195	420	175	1000		
G07B22-166A20	2200/500	365-1665	207	200	500	195	1000	1040	2
G07B22-166B20					510				1200
G07B22-166A40				220	510	2			
G07B22-166B40					520	3			
G07B27-189A40	2700/500	460-1890	228	245	610	355	1200	1140	2
G07B27-189B40					620	300			3
G07B27-189A60				255	620	350	1400		2
G07B27-189B60					630	295			3
G07B27-189A70				280	630	340	1500		2
G07B27-189B70					640	290			3
G07B32-189B40	3200/500	460-1890	228	330	710	355	1200	1140	3
G07B32-189C40					720	300			4
G07B32-189B60				320	730	345	1400		3
G07B32-189C60					740	295			4
G07B32-189B70				315	740	340	1500		3
G07B32-189C70					750	290			4

注：
1. 张臂范围指货叉内侧距离。
2. 侧移式和旋转式要求叉车增加2组附加油路，非侧移式要求叉车增加1组附加油路。
3. 叉夹的货叉上可根据用户要求加装各类特色叉臂。
4. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。


Note:
1. Opening range is inside to inside of the forks.
2. Two additional hydraulic circuits required on truck for Sideshifting and Rotating models, one additional on truck for Non-Sideshifting models.
3. Customized arms can be added on forks according to requirements.
4. All products as listed are standard models, custom products can be provided according to detailed requirements.

旋转扭矩 Rotating Torque

型号 Model	转速 Rotating Speed	扭矩 Torque
G07-10	5r/min@25LPM	4800Nm@140Bar
G07-15		
G07-20	5r/min@60LPM	8155Nm@140Bar
G07-25		
G07-30		

叉
夹
Fork Clamps

G/GJ系列

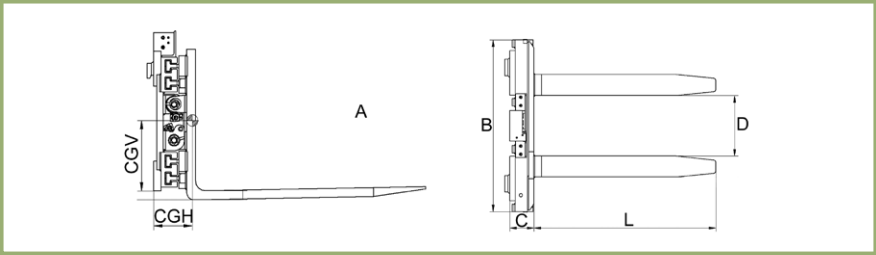

侧移式

Sideshifting


型 号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre	张臂范围 Opening Range	失 载 距 Effective Thickness	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	叉 长 Arm Length	框架宽度 Frame Width	安 装 等 级 Mounting Class
	(kg/mm)	D (mm)	C (mm)				L (mm)	B (mm)	
GJ07SL20-166A40	2000/500	365-1665	147	220	355	265	1200	1040	2
GJ07SL20-189A40	2000/500	460-1890		215	375			1100	
GJ07SL27-189B40	2700/500	460-1890	158	245	455	245	1200	1140	3
G07S10-154A10	1000/500	440-1540	175	160	300	170	900	850	2
G07S10-154A20				190	310	160	1000		
G07S15-166A10	1500/500	365-1665	180	165	410	180	900	1040	2
G07S15-166A20				195	420	175	1000		
G07S22-166A20	2200/500	365-1665	210	200	500	195	1000	1040	2
G07S22-166B20					510				3
G07S22-166A40				220	510	1200			2
G07S22-166B40					520				3
G07S27-189A40	2700/500	460-1890	140	245	610	355	1200	1140	2
G07S27-189B40					620	300			3
G07S27-189A60				255	620	350	1400		2
G07S27-189B60					630	295			3
G07S27-189A70				280	630	340	1500		2
G07S27-189B70					640	290			3
G07S32-189B40	3200/500	460-1890	250	330	710	355	1200	1140	3
G07S32-189C40					720	300			4
G07S32-189B60				320	730	345	1400		3
G07S32-189C60					740	295			4
G07S32-189B70				315	740	340	1500		3
G07S32-189C70					750	290			4

流量与压力

Hydraulic Flow & Pressure

非侧移/侧移（旋转） Non-Sideshifting/Sideshifting(Rotating)

型 号 Model	最小流量 Minimum	推荐流量 Recommended	最大流量 Maximum	最大压力 Maximum Pressure
	LPM			BAR
G07-10	15 (20)	25	25 (40)	180
G07-15				
G07-20				
G07-25	15 (20)	40	40 (60)	180
G07-30				

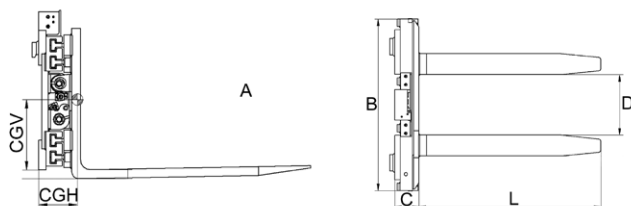

旋 转 式

Rotating

型 号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre	张臂范围 Opening Range	失 载 距 Effective Thickness	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight	垂直重心 Vertical Center of Gravity CGV (mm)	叉 长 Arm Length	框架宽度 Frame Width	安 装 等 级 Mounting Class
	(kg/mm)	D (mm)	C (mm)		(kg)		L (mm)	B (mm)	
GJ07RL20-166A40	2000/500	365-1665	336	265	615	325	1200	1040	2
GJ07RL20-189A40	2000/500	460-1890		260	635			1100	
GJ07RL27-189B40	2700/500	460-1890	352	280	715	305	1200	1140	3
G07R15-166A10	1500/500	365-1665	264	190	590	280	900	1040	2
G07R15-166A20				210	600	275	1000		
G07R22-166A20	2200/500	365-1665	336	250	700	270	1000	1040	2
G07R22-166B20					710				3
G07R22-166A40				265	710	1200	2		
G07R22-166B40					720		3		
G07R27-189A40	2700/500	460-1890	352	245	830	320	1200	1140	2
G07R27-189B40						245			3
G07R27-189A60				280	850	320	1400		2
G07R27-189B60						245			3
G07R27-189A70				300	860	320	1500		2
G07R27-189B70						245			3
G07R30-185B40	3000/500	420-1850	274	227	875	375	1200	1140	3
G07R30-210B40	3000/500	540-2140	274	215	950	375	1200	1300	3
G07R35-140B40	3500/500	450-1400	361	276	1170	485	1200	1000	3
G07R35-160B40	3500/500	270-1600	361	276	1260	485	1200	1300	3
G07R35-166B40	3500/500	365-1660	361	276	1224	485	1200	1200	3
G07R35-185B40	3500/500	420-1850	361	276	1260	485	1200	1250	3
G07R40-203C80	4000/600	640-2030	422	260	1546	380	1600	1300	4
G07R40-206B80	4000/600	660-2060	370	225	1500	370	1600	1300	4
G07R40-220C10	4000/600	830-2200	442	295	1700	380	1800	1300	4
G07R45-220C40	4500/600	620-2200	396	254	1655	375	1200	1300	4
G07R60-400C70	6000/600	1800-4000	549	403	2770	471	1500	2650	4

叉
夹

Fork Clamps