

# 桶 夹

## DRUM CLAMPS



### 应用范围：

广泛应用于石油、化工、冶金、制造、港口等

### Applications:

Used in the petroleum and chemical industries and in other applications that require the handling of standard 55-gallon drums.

### 产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- E型槽的整体框架，提高产品的稳定性和寿命
- 多块橡胶垫组合夹臂，易于更换，节省维修费用
- 设计合理，美观大方，采用世界上最优质的液压元件

### Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- E-Style-Slot frame provides excellent stability and longer operating life.
- Multiple rubber pads mounting in both clamps arms, easily replacement, reduce maintenance cost.
- Reasonable design with dependable world top quality hydraulic components.

### 产品系列：

- 侧移式
- 非侧移式
- 旋转式
- 倾翻式


### Product Series:

- Non-sideshifting
- Sideshifting
- Rotating
- Low Tiltng



GRIPFTA



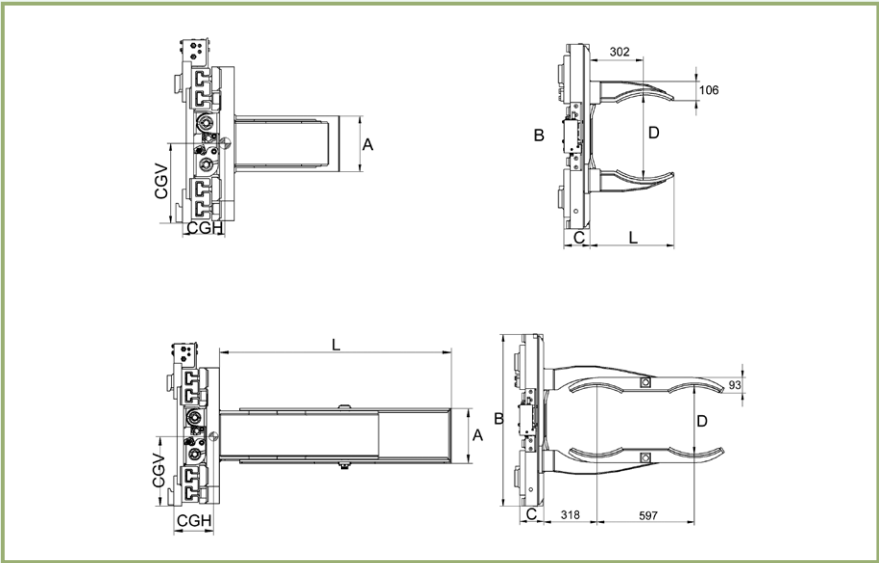


非侧移式 Non-Sideshifting

| 类别<br>Type               | 型 号<br>Model    | 载荷能力/<br>载荷中心<br>Capacity/<br>Load Centre<br><br>(kg/mm) | 张臂范围<br>Opening<br>Range<br><br>D<br>(mm) | 失 载 距<br>Effective<br>Thickness<br><br>C<br>(mm) | 水平重心<br>Horizontal<br>Center of<br>Gravity<br>CGH<br>(mm) | 自 重<br>Weight<br><br>(kg) | 垂直重心<br>Vertical<br>Center of<br>Gravity<br>CGV<br>(mm) | 臂 长<br>Arm<br>Length<br><br>L<br>(mm) | 臂 高<br>Arm<br>Height<br><br>A<br>(mm) | 框架宽度<br>Frame<br>Width<br><br>B<br>(mm) | 安 装<br>等 级<br>Mounting<br>Class |
|--------------------------|-----------------|----------------------------------------------------------|-------------------------------------------|--------------------------------------------------|-----------------------------------------------------------|---------------------------|---------------------------------------------------------|---------------------------------------|---------------------------------------|-----------------------------------------|---------------------------------|
| 2<br><br>桶<br><br>2Drums | GJ06BL15-175A12 | 1500/500                                                 | 460-1760                                  | 139                                              | 105                                                       | 380                       | 270                                                     | 455                                   | 220                                   | 1040                                    | 2                               |
|                          | GJ06BL20-175A12 | 2000/500                                                 |                                           | 147                                              |                                                           | 390                       | 265                                                     |                                       |                                       |                                         | 3                               |
|                          | GJ06BL20-175B12 |                                                          |                                           |                                                  |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |
| 4<br><br>桶<br><br>4Drums | GJ06BL15-170A24 | 1500/500                                                 | 460-1760                                  | 139                                              | 280                                                       | 400                       | 270                                                     | 1045                                  | 240                                   | 1040                                    | 2                               |
|                          | GJ06BL20-170A24 | 2000/500                                                 |                                           | 147                                              |                                                           | 410                       | 265                                                     |                                       |                                       |                                         | 3                               |
|                          | GJ06BL20-170B24 |                                                          |                                           |                                                  |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |

注：  
1. 侧移式和旋转式要求叉车增加2组附加油路，非侧移式要求叉车增加1组附加油路。  
2. 张臂范围指桶夹夹板弧度内侧间距。  
3. 适合搬运55加仑（美制205公斤）标准。旋转式桶夹可360°旋转。  
4. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。


Note:  
1. Two additional hydraulic circuits required on truck, for Sideshifting and Rotating model, one additional on truck for Non-Side shifting models.  
2. Opening range is inside to inside of the radian medial spacing of contacting pads.  
3. Suitable for handling 55 gallon(American 205 liters) standard drums.360 degree rotation for the rotating models.  
4. All products as listed are standard models, custom products can be provided according to the detailed requirements.


GJ系列

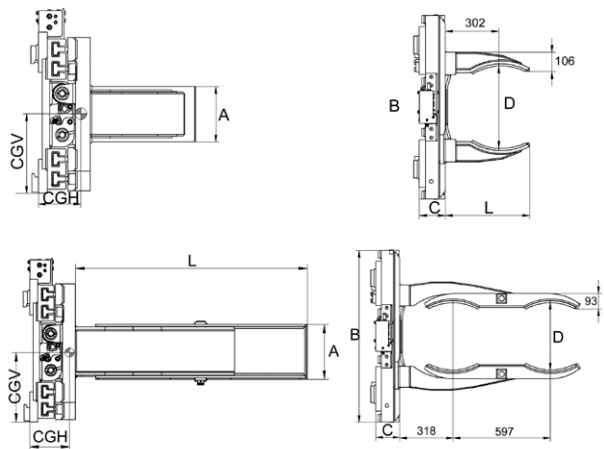

侧移式 Sideshifting

| 类别<br>Type               | 型 号<br>Model    | 载荷能力/<br>载荷中心<br>Capacity/<br>Load Centre | 张臂范围<br>Opening<br>Range | 失 载 距<br>Effective<br>Thickness | 水平重心<br>Horizontal<br>Center of<br>Gravity<br>CGH<br>(mm) | 自 重<br>Weight<br><br>(kg) | 垂直重心<br>Vertical<br>Center of<br>Gravity<br>CGV<br>(mm) | 臂 长<br>Arm<br>Length<br><br>L<br>(mm) | 臂 高<br>Arm<br>Height<br><br>A<br>(mm) | 框架宽度<br>Frame<br>Width<br><br>B<br>(mm) | 安 装<br>等 级<br>Mounting<br>Class |
|--------------------------|-----------------|-------------------------------------------|--------------------------|---------------------------------|-----------------------------------------------------------|---------------------------|---------------------------------------------------------|---------------------------------------|---------------------------------------|-----------------------------------------|---------------------------------|
|                          |                 | (kg/mm)                                   | D<br>(mm)                | C<br>(mm)                       |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |
| 2<br><br>桶<br><br>2Drums | GJ06SL15-175A12 | 1500/500                                  | 460-1760                 | 139                             | 100                                                       | 380                       | 270                                                     | 455                                   | 220                                   | 1040                                    | 2                               |
|                          | GJ06SL20-175A12 | 2000/500                                  |                          | 147                             |                                                           | 390                       | 265                                                     |                                       |                                       |                                         | 3                               |
|                          | GJ06SL20-175B12 |                                           |                          |                                 |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |
| 4<br><br>桶<br><br>4Drums | GJ06SL15-170A24 | 1500/500                                  | 460-1760                 | 139                             | 280                                                       | 400                       | 270                                                     | 1045                                  | 240                                   | 1040                                    | 2                               |
|                          | GJ06SL20-170A24 | 2000/500                                  |                          | 147                             |                                                           | 410                       | 265                                                     |                                       |                                       |                                         | 3                               |
|                          | GJ06SL20-170B24 |                                           |                          |                                 |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |
| 倾翻式 Low Tilting          |                 |                                           |                          |                                 |                                                           |                           |                                                         |                                       |                                       |                                         |                                 |
| 1桶<br>1Drums             | G16B10-170B32   | 1000/500                                  | 430-1880                 | 162                             | 378                                                       | 670                       | 222                                                     | 1100                                  | 220                                   | 1100                                    | 3                               |

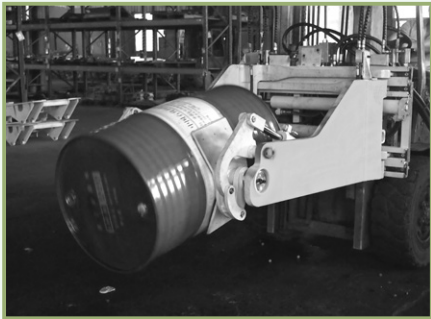

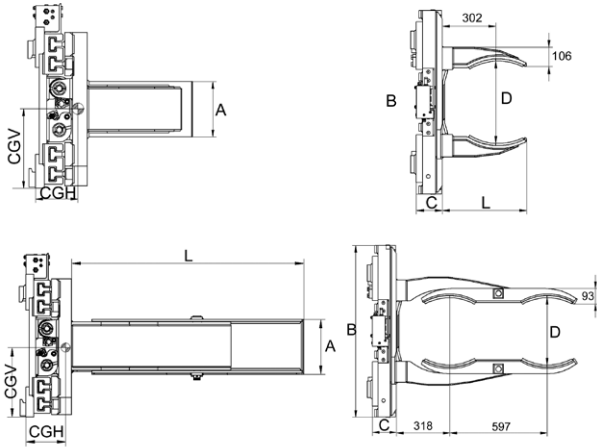

旋 转 式 *Rotating*

| 类 别<br>Type      | 型 号<br>Model    | 载 荷 能 力 /<br>载 荷 中 心<br>Capacity/<br>Load Centre<br>(kg/mm) | 张 臂 范 围<br>Opening<br>Range<br>D<br>(mm) | 失 载 距<br>Effective<br>Thickness<br>C<br>(mm) | 水 平 重 心<br>Horizontal<br>Center of<br>Gravity<br>CGH<br>(mm) | 自 重<br>Weight<br>(kg) | 垂 直 重 心<br>Vertical<br>Center of<br>Gravity<br>CGV<br>(mm) | 臂 长<br>Arm<br>Length<br>L<br>(mm) | 臂 高<br>Arm<br>Height<br>A<br>(mm) | 框 架 宽 度<br>Frame<br>Width<br>B<br>(mm) | 安 装<br>等 级<br>Mounting<br>Class |
|------------------|-----------------|-------------------------------------------------------------|------------------------------------------|----------------------------------------------|--------------------------------------------------------------|-----------------------|------------------------------------------------------------|-----------------------------------|-----------------------------------|----------------------------------------|---------------------------------|
| 2<br>桶<br>2Drums | GJ06RL15-175A12 | 1500/500                                                    | 460-1760                                 | 264                                          | 150                                                          | 530                   | 270                                                        | 455                               | 220                               | 1040                                   | 2                               |
|                  | GJ06RL20-175A12 | 2000/500                                                    |                                          | 336                                          | 140                                                          | 540                   | 290                                                        |                                   |                                   |                                        | 3                               |
|                  | GJ06RL20-175B12 |                                                             |                                          |                                              |                                                              |                       | 325                                                        |                                   |                                   |                                        |                                 |
| 4<br>桶<br>4Drums | GJ06RL15-170A24 | 1500/500                                                    | 460-1760                                 | 264                                          | 180                                                          | 550                   | 290                                                        | 1045                              | 240                               | 1040                                   | 2                               |
|                  | GJ06RL20-170A24 | 2000/500                                                    |                                          | 336                                          | 165                                                          | 560                   | 325                                                        |                                   |                                   |                                        | 3                               |
|                  | GJ06RL20-170B24 |                                                             |                                          |                                              |                                                              |                       |                                                            |                                   |                                   |                                        |                                 |

- 注：  
1. 侧移式和旋转式要求叉车增加2组附加油路，非侧移式要求叉车增加1组附加油路，  
2. 张臂范围指桶夹夹板弧度内侧面间距，  
3. 适合搬运55加仑（美制205公斤）标准。旋转式桶夹可360°旋转，  
4. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:  
1. Two additional hydraulic circuits required on truck, for Sideshifting and Rotating model, one additional on truck for Non-Side-shifting models.  
2. Opening range is inside to inside of the radian medial spacing of contacting pads.  
3. Suitable for handling 55 gallon(American 205 liters) standard drums.360 degree rotation for the rotating models.  
4. All products as listed are standard models, custom products can be provided according to the detailed requirements.

流 量 与 压 力 *Hydraulic Flow & Pressure* 非侧移/侧移（旋转） Non-Sideshifting/Sideshifting(Rotating)

| 型 号<br>Model | 最小流量<br>Minimum | 推荐流量<br>Recommended | 最大流量<br>Maximum | 最大压力<br>Maximum Pressure |
|--------------|-----------------|---------------------|-----------------|--------------------------|
|              | LPM             |                     |                 | BAR                      |
| G06-15       | 15 (20)         | 25                  | 25 (40)         | 180                      |
| G06-20       | 15 (20)         | 25 (40)             | 25 (60)         | 180                      |