

软包夹 / 纸浆包夹

BALE CLAMPS/PULP BALE CLAMPS



应用范围：

适用于搬运纸浆、棉花、羊毛、废纸等弹性易变形产品。

Applications:

Used in palletless handling of pulp bales, cotton, wool, waste paper and other elastic & deformed operations.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业。
- E型槽的整体框架，提高产品的稳定性和寿命。
- 设计合理，美观大方，采用世界上最优质的液压元件。

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- E-Style-Slot frame provides excellent stability and longer operating life.
- Reasonable design with dependable world top quality hydraulic components.


产品系列：

- 侧移式
- 非侧移式
- 旋转式

Product Series:

- Non-sideshifting
- Sideshifting
- Rotating



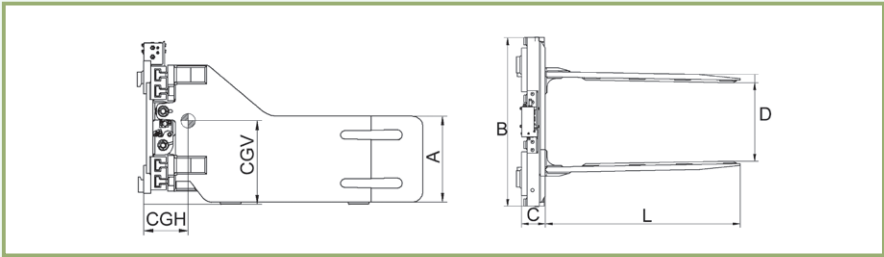


非侧移式 Non-Sideshifting

型 号 Model	载荷能力 / 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失 载 距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	臂 长 Arm Length L (mm)	臂 高 Arm Height A (mm)	框架宽度 Frame Width B (mm)	安 装 等 级 Mounting Class		
G04BL27-200B43	2700/500	570-2000	158	335	590	245	1200	450	1140	3		
G04BL25-230B43	2500/500	490-2300		310	680				1600			
GJ04BL20-179A42	2000/500	490-1790	147	340	470	265	1200	400	1040	2		
GJ04BL20-200A42	2000/500	550-2000		330	490				1100			
GJ04BL27-200B43	2700/500	570-2000	158	335	590	245	1200	450	1140	3		
GJ04BL25-230B43	2500/500	490-2300		310	680				1600			
G04B10-159A11	1000/500	490-1590	133	115	410	270	900	350	850	2		
G04B10-160A01		500-1600		108	390		800					
G04B15-179A42	1500/500	490-1790	139	280	560	270	1200	400	1040	2		
G04B15-180A22		500-1800			520		1000					
G04B22-179A42	2200/500	490-1790	147	340	570	265	1200	400	1040	2		
G04B22-179B42					580					3		
G04B22-180A22		500-1800		335	530		1000			2		
G04B22-180B22					540					3		
G04B20-200A42	2000/500	550-2000	147	340	590	265	1200	400	1140	2		
G04B20-200B42					600					3		
G04B20-200A53				350	600		1350			450	2	
G04B20-200B53					610						3	
G04B20-201A22		560-2010		335	570		1000			400	2	
G04B20-201B22					580						3	
G04B27-200B43	2700/500	570-2000	158	335	725	245	1200	450	1140	3		
G04B27-201B43		580-2010		330	725		1200					
G04B25-230B43	2500/500	490-2300		310	810		1200		1600			
G04B30-200B43	3000/500	570-2000	161	310	815	240	1200	450	1140	3		
G04B30-201B23		580-2010		310	795		1000		1600			
G04B30-230B43		490-2300		305	900		1200		1600			
G04B35-200B43	3500/500	570-2000	175	385	1100	305	1200	450	1140	3		
G04B35-200C43					1110				4			
G04B35-230B43		490-2300		390	1210		1200		1600	3		
G04B35-230C43					1220				1600	4		

注：
1. 属具侧移式和旋转式要求叉车增加2组附加油路，非侧移式产品要求叉车增加1组附加油路。
2. 张臂范围指夹臂两臂尖内径距离。
3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:
1. Two additional hydraulic circuits required on truck for Sideshifting and Rotating models, one additional on truck for Non-Sideshifting models.
2. Opening range is inside to inside of the arm tip.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

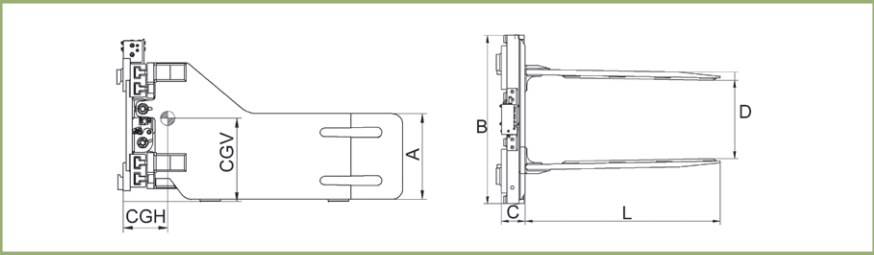


侧移式 Sideshifting

型 号 Model	载 荷 能 力 / 载 荷 中 心 Capacity/ Load Centre (kg/mm)	张 臂 范 围 Opening Range D (mm)	失 载 距 Effective Thickness C (mm)	水 平 重 心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂 直 重 心 Vertical Center of Gravity CGV (mm)	臂 长 Arm Length L (mm)	臂 高 Arm Height A (mm)	框 架 宽 度 Frame Width B (mm)	安 装 等 级 Mounting Class			
G04SL27-200B43	2700/500	570-2000	158	335	590	245	1200	450	1140	3			
G04SL25-230B43	2500/500	490-2300		310	680				1600				
GJ04SL20-179A42	2000/500	490-1790	147	340	470	265	1200	400	1040	2			
GJ04SL20-200A42	2000/500	550-2000		330	490				1100				
GJ04SL27-200B43	2700/500	570-2000	158	335	590	245	1200	450	1140	3			
GJ04SL25-230B43	2500/500	490-2300		310	680				1600				
G04S10-159A11	1000/500	490-1590	100	112	410	270	900	350	850	2			
G04S10-160A01		500-1600		105	390		800						
G04S15-179A42	1500/500	490-1790	125	275	560	270	1200	400	1040	2			
G04S15-180A22		500-1800			520		1000						
G04S22-179A42	2200/500	490-1790	135	337	570	265	1200	400	1040	2			
G04S22-179B42					580					3			
G04S22-180A22		500-1800		332	530		1000			2			
G04S22-180B22					540					3			
G04S20-200A42	2000/500	550-2000	135	340	590	265	1200	400	1140	2			
G04S20-200B42					600					3			
G04S20-200A53				350	600		1350			2			
G04S20-200B53					610					3			
G04S20-201A22		560-2010		335	570		1000			2			
G04S20-201B22					580					3			
G04S27-200A43	2700/500	570-2000	140	330	725	245	1200	450	1140	3			
G04S27-201B23	2700/500	580-2010		326	725		1000						
G04S25-230B43	2500/500	490-2300		306	810		1200		1600				
G04S30-200B43	3000/500	570-2000	145	304	815	255	1200	450	1140	3			
G04S30-201B23		580-2010		306	795		1000		1600				
G04S30-230B43		490-2300		302	900		1200						
G04S35-200B43	3500/500	570-2000	175	385	1100	305	1200	450	1140	3			
G04S35-200C43					1110				1600	4			
G04S35-230B53		490-2300		390	1210		1350			3			
G04S35-230C53					1220					4			
G04S40-230C53	4000/600	490-2300	199	395	1400	300	1200	500	1600	4			
G04S50-230C53	5000/600		257	410	2100	290	1200	500	1600	4			

注：
1. 属具侧移式和旋转式要求叉车增加2组附加油路，非侧移式产品要求叉车增加1组附加油路；
2. 张臂范围指夹臂两臂尖内径距离；
3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:
1. Two additional hydraulic circuits required on truck for Sideshifting and Rotating models, one additional on truck for Non-Sideshifting models.
2. Opening range is inside to inside of the arm tip.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

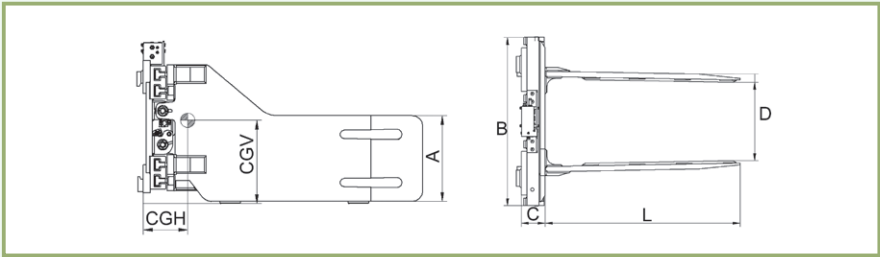

旋 转 式 *Rotating*

型 号 Model	载荷能力 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失 载 距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	臂 长 Arm Length L (mm)	臂 高 Arm Height A (mm)	框架宽度 Frame Width B (mm)	安 装 等 级 Mounting Class			
GJ04RL20-179A42	2000/500	490-1790	336	365	670	325	1200	400	1040	2			
GJ04RL20-200A42	2000/500	550-2000		360	690				1100				
GJ04RL27-200B43	2700/500	570-2000	352	425	795	305	1200	450	1140	3			
GJ04RL25-230B43	2500/500	490-2300		405	885				1600				
G04R10-159A11	1000/500	490-1590	255	240	540	280	900	350	850	2			
G04R10-160A01		500-1600			520		800						
G04R15-179A42	1500/500	490-1790	264	260	720	290	1200	400	1040	2			
G04R15-180A22		500-1800			700		1000						
G04R22-179A42	2200/500	490-1790	336	365	720	325	1200	400	1040	2			
G04R22-179B42					770					3			
G04R22-180A22		500-1800		360	740		1000			2			
G04R22-180B22					750					3			
G04R27-200B43	2700/500	570-2000	352	425	930	325	1200	450	1140	3			
G04R27-201B23		580-2010		360	910						1000		
G04R30-200B43	3000/500	570-2000	355	420	950	330	1200	450	1140	3			
G04R30-201B23		580-2010		355	930		1000						

- 注:
1. 属具侧移式和旋转式要求叉车增加2组附加油路，非侧移式产品要求叉车增加1组附加油路；
 2. 张臂范围指夹臂两臂尖内径距离；
 3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

- Note:
1. Two additional hydraulic circuits required on truck for Sideshifting and Rotating models, one additional on truck for Non-Sideshifting models.
 2. Opening range is inside to inside of the arm tip.
 3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

流量与压力 *Hydraulic Flow & Pressure*

型 号 Model	最小流量 Minimum	推荐流量 Recommended	最大流量 Maximum	最大压力 Maximum Pressure
	LPM			BAR
G04-10	15(20)	25	25(40)	180
G04-15				
G04-20				
G04-25	15(20)	40	40(60)	180
G04-30				

非侧移/侧移（旋转） Non-Sideshifting/Sideshifting(Rotating)

附件: 1. 侧移保压阀 Check Valve with SS

旋转扭矩 *Rotating Torque*

型 号 Model	转 速 Rotating Speed	扭 矩 Torque
G04-10	5r/min@25LPM	4800Nm@140Bar
G04-15		
G04-20		
G04-27	5r/min@60LPM	8155Nm@140Bar
G04-35		

